PE-9303 – Wireless to Wired Convertor

User Manual

PE-9303 convert wireless signal to wired signal and it can convert signal for max 8 wireless devices. Please code the wireless device to the repeater before using.

Features:

1. can code max 8 wireless device
2. wireless transmit frequency: 433MHz
3. work voltage: 11.5-15.5V
4. work current: 33-39mA
5. included 12V/1000mA external power adapter
6. dimension is 167*112*40mm / ivory white color

Installation / Open Cover:

1. Open the cover;
2. Remove the PCB board;
3. Put the base cover on the wall and point out where to drill hole for screws;
4. Remove the base cover and drill holes on the wall;
5. Put the base cover to the wall, let the wire of the device which will connect to the convertor through the wire outlet hole and connect it to the convertor;
6. Fix the base cover on the wall by screws;
7. Install the PCB back;
8. Cover the front cover.

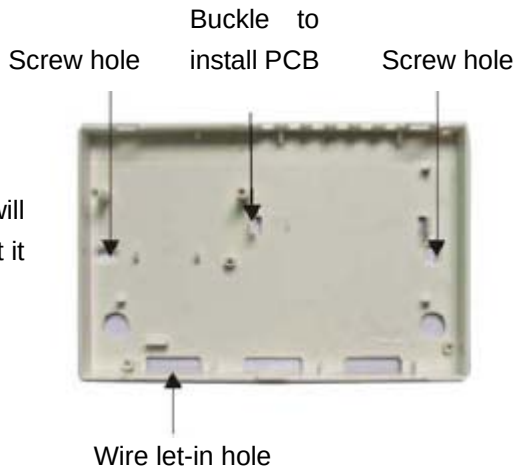

Coding Method:

Connect the power, press the switch of each zone, and then trigger the wireless device, the LED according to the zone will light off for 5 seconds. Then coding successfully. For example, coding the wireless device to No.1 zone, press the No.1 switch, then trigger the wireless device, the red No.1 LED will be off for 5 seconds, this means coding successfully.

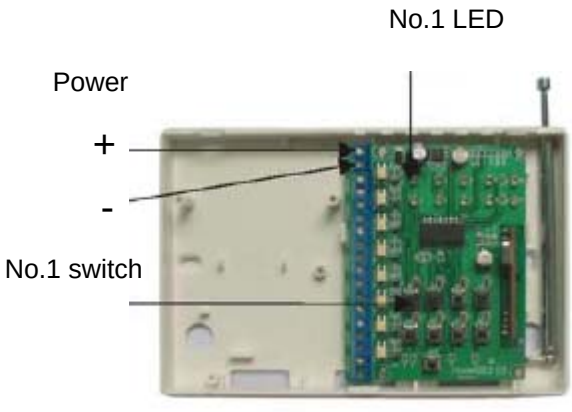

Delete Coding Method:

If you need to recode another wireless device to a zone which had coded with a wireless device already, you need to delete the coding first. Operation as below: press and hold the switch of the zone which you want to delete coding and then press [CLR] switch, then yellow LED will normally on, then delete coding successfully.

Transmitting wireless signal:

Trigger the wireless device which had coded to the convertor, the LED of the zone will light off for 5 seconds, and the relay output terminal of the zone will open for 5 seconds. For example, a wireless detector has coded to No 3

zone, when trigger the detector, No.3 LED will turn off for 5 seconds, the wired output terminal will open for 5 seconds.

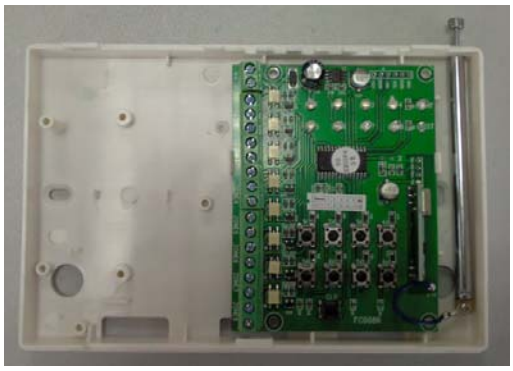

Inside configuration

2 sets screws with countersink heads

Warning: we are not responsible for the problem caused by improper operation or change the product configuration, it may lose the authority of product warranty!